




機械尺寸
(Machine Dimensions)

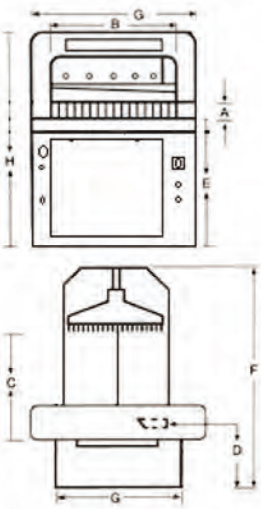

參數 \ 機種 SPECIFICATIONS				LG-H550C (21")	LG-H720C (28")
A	裁切厚度 Cutting Thickness	mm (inch)		95 (3.74)	95 (3.74)
B	裁切寬度 Cutting Width	mm (inch)		550 (21.65)	720 (28.34)
C	裁切長度 Cutting Length	mm (inch)		550 (21.65)	720 (28.34)
D	前台面高度 Front Table Length	mm (inch)		450 (17.71)	450 (17.71)
E	檯面高度 Table Height	mm (inch)		900 (35.43)	900 (35.43)
F	機台總長度 Machine Length	mm (inch)		1360 (53.54)	1530 (60.23)
G	機台總寬度 Machine Width	mm (inch)		1080 (42.51)	1250 (49.21)
H	機台總高度 Machine Height	mm (inch)		1350 (53.14)	1350 (53.14)
電 壓 Electrical Supply				照需求 As required	照需求 As required
主機馬達 Main Motor				KW (HP) 1.5 (2)	KW (HP) 1.5 (2)
推板馬達 Paper Feeding Motor				KW (HP) 0.1875 (0.25)	KW (HP) 0.1875 (0.25)
機台總重量 Measurement				Kg (lbs) 430 (946)	Kg (lbs) 540 (1188)

★ 產品規格若有變更，恕不另行通知。 Technical data subject to change without notice



穩定之鋼鐵架構
Robust Construction



高精密密度螺桿與雙導軌
Ball screw for high precision cut



CE規範安全光閘
Infra red photocells gurage CE in (L).

- 機座以高強度結構組合，機械運轉穩固，裁切準確
- 7吋觸控人機介面，操作簡單，後擋板精準度達0.1mm
- 油壓驅動壓板與裁切，精確安靜、乾淨俐落
- 時間限制開關，確保雙手驅動下刀，防止誤觸落刀
- 腳踏式前段壓板，提高裁切品質
- 後推板以高精密密度螺桿與雙導軌組成，定位精確，免經常校正
- L型安全電眼與緊急停止開關，確保操作安全
- 手動微調開關，可微調後推板位置
- 附裁切線燈與照明設備
- 適用裁切材料: 紙張、紙板、薄木片、碳纖維、塑膠片...等薄片
- Infra red photocells guards CE in (L).
- Inox table, cast iron frame.
- Time-limited two hands cut control with inhibition of successive cut.
- Touch screen program with universal languish (using simple signs).
- Foot pedal for pre-pressing to insure a better-cut accuracy.
- Hydraulic fnife cut for high quality and powerful cut.
- Hydraulic press adjustable in pressure to cut: thick paper, cardboard, bristol, plastic, covers, books.....
- Knife depth sadjustable, delivered with 2 knives.
- Cutting line.
- Emergency stop button.
- Cover on rear table.
- Side lead screw with double guiding bar, (no hole on table) and back gurage made in cast.